





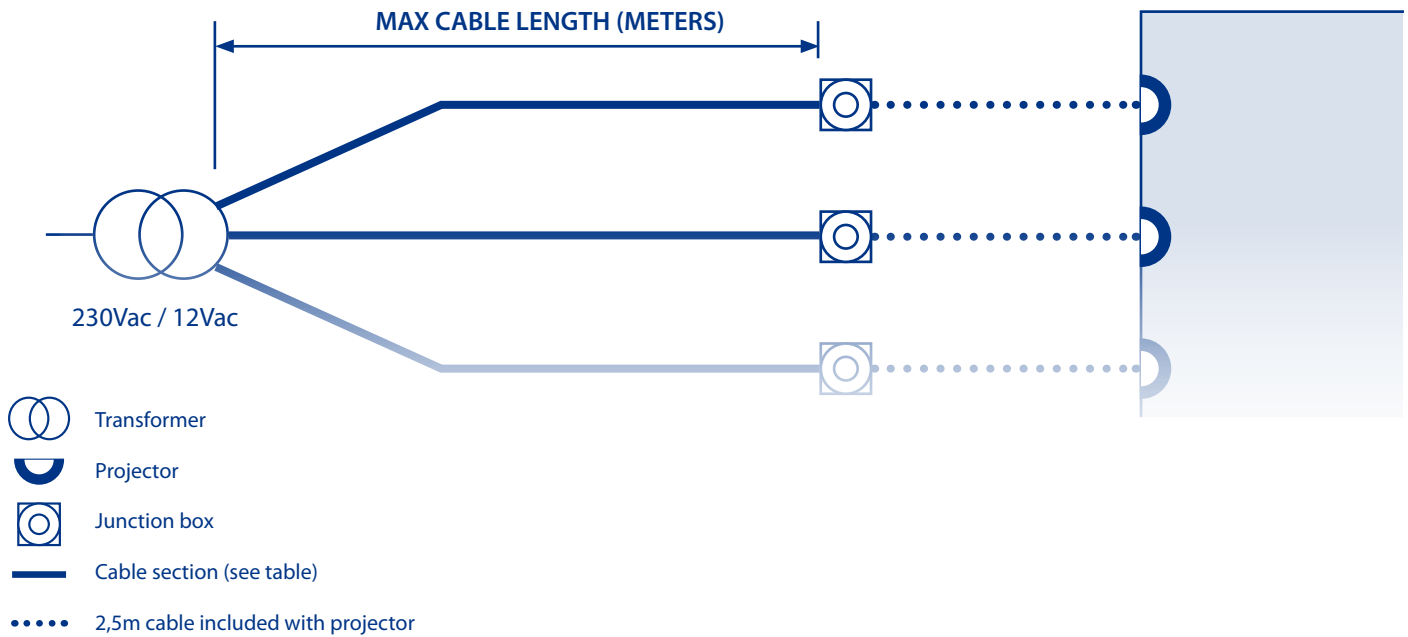


▶ PARALLEL CONNECTION INSTALLATION

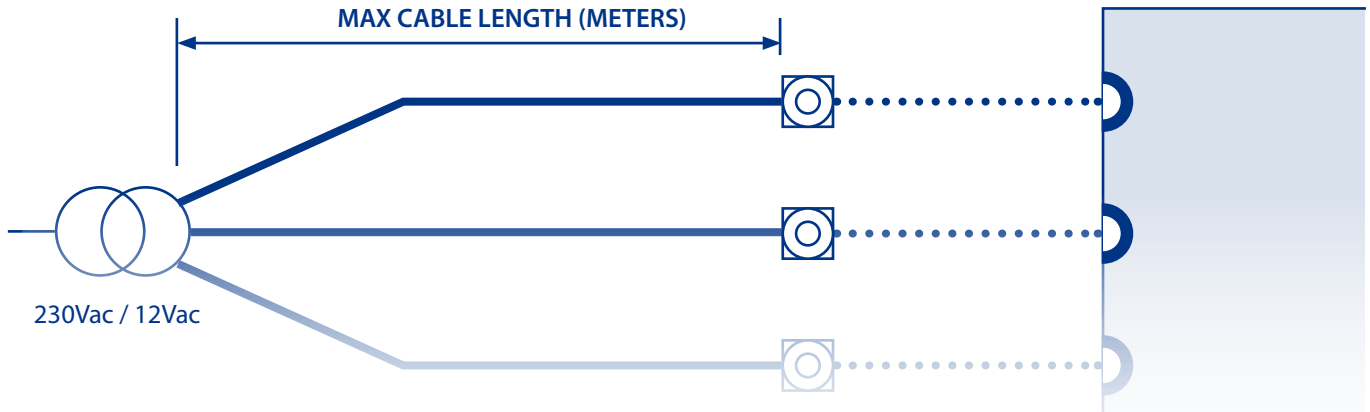

CODE	MODEL	MAX CABLE LENGTH (METERS)					
		2x1,5mm ²	2x2,5mm ²	2x4mm ²	2x6mm ²	2x10mm ²	2x16mm ²
56001	LumiPlus PAR56 V1 AC RGB lamp	7	14	22	33	56	90
59126	LumiPlus PAR56 V1 AC RGB Wireless lamp						
71205	LumiPlus Flexi V1 AC RGB wireless						
71203	LumiPlus Flexi V1 AC RGB	16	33	54	81	135	216
52596	LumiPlus PAR56 V1 AC W lamp						
71200	LumiPlus Flexi V1 AC W						
71212	LumiPlus FlexiNiche V1 AC W						
71214	LumiPlus FlexiSLIM V1 AC W						
71216	LumiPlus FlexiRapid V1 AC W	65	135	215	320	530	870
67515	LumiPlus PAR56 V1 DC W lamp						
71201	LumiPlus Flexi V1 DC W						
71213	LumiPlus FlexiNiche V1 DC W						
71215	LumiPlus FlexiSLIM V1 DC W						
71217	LumiPlus FlexiRapid V1 DC W	3	7	11	17	29	47
43411	LumiPlus PAR56 V2 AC RGB lamp						
45637	LumiPlus PAR56 V2 AC RGB DMX lamp	27	55	90	140	240	380
67516	LumiPlus PAR56 V2 DC W lamp						
71202	LumiPlus Flexi V2 DC W						
71233	LumiPlus Flexi V2 AC W	7	14	23	35	58	93
71204	LumiPlus Flexi V2 AC RGB	3	8	13	20	33	58
71208	LumiPlus Flexi V2 AC RGB DMX						
59803	LumiPlus Design RGB						
59801							
59811	LumiPlus Design RGB DMX						
59809							
59807							
59805	LumiPlus Design W						

► **PARALLEL CONNECTION INSTALLATION**



-  Transformer
-  Projector
-  Junction box
-  Cable section (see table)
-  2,5m cable included with projector

CODE	MODEL	MAX CABLE LENGTH (METERS)					
		2x1,5mm ²	2x2,5mm ²	2x4mm ²	2x6mm ²	2x10mm ²	2x16mm ²
52124 - 52125 52126 - 52127 52128 - 52129 52130 - 52131 52132 - 52133 52134 - 52135 52136 - 52137 52138 - 52139 52140 - 52141	LumiPlus Mini V2	34	68	109	162	272	436
59971 - 59972 59973 - 59974 59975 - 59976 59977 - 59978 59979 - 59980 59981 - 59982 69633 - 69634 69635 - 69636 69637 - 69638	LumiPlus Mini V3	34	68	109	162	272	436
38814 - 38816 40765 - 40766 64552 - 64553 64554 - 64555 64557 - 64558 64559 - 64560	LumiPlus Micro	34	68	109	162	272	436

Cross-section calculations accomplish IEC 60287-1-3:2002 standards